



NSF®
CERTIFIED TO NSF/ANSI/CAN 61
(ONLY FOR CPVC)

SKIPPER
PIPES




SKIPPER.
INDIA'S SAFEST PIPES

PRODUCT PORTFOLIO

COMPLETE RANGE OF POLYMER PIPING SYSTEM AND BATH FITTINGS

CASING & SCREEN PIPES

Solution to Borewell And Tubewell Applications

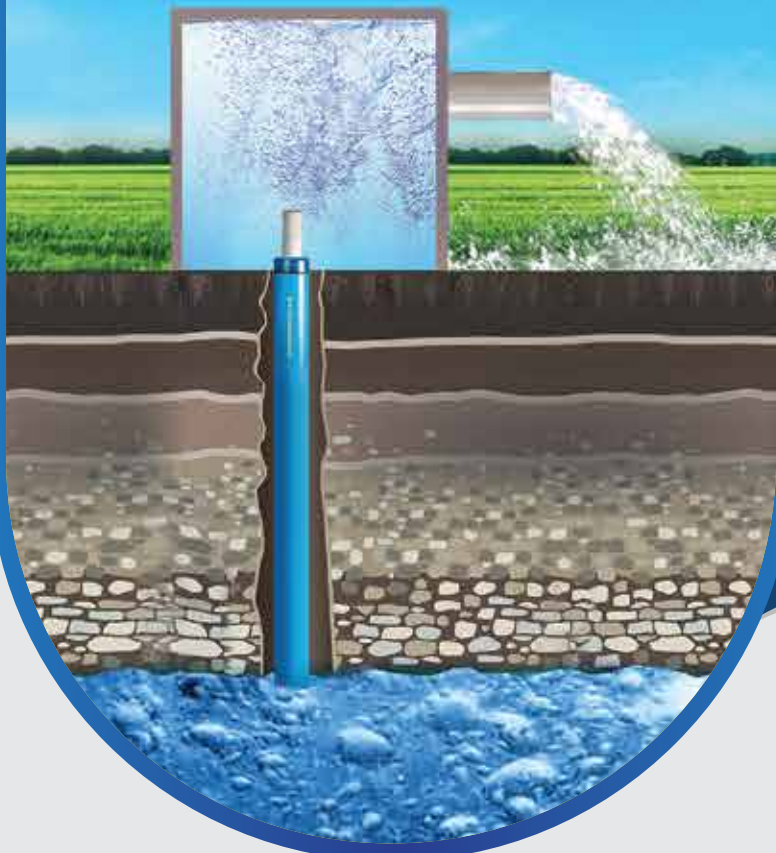

CASING & SCREEN PIPES

Solution to Borewell & Tubewell Application

Skipper offers comprehensive range of Casing & Ribbed Screen Pipes that are manufactured using a high quality UPVC compound & are ideal for the transportation of hard, salty, sandy or chemically aggressive water. These pipes are also anti-corrosive having high tensile strength to withstand high impact and minimum water friction.

Casing Pipes are classified into those suitable for shallow, medium and deep depth wells as under:

- a) CS Pipe:** Shallow well casing pipes suitable for wells with depths upto 80 m.
- b) CM Pipe:** Medium well casing pipes suitable for wells with depths above 80 m and upto 250 m.
- c) CD Pipe:** Deep well casing pipes suitable for wells with depths above 250 m and upto 450 m.

Product Range

SLOTTED & RIBBED CASING PIPES		
Ribbed Strainer Pipes	Slotted Pipes-CM	Slotted Pipes-CS
40 to 250mm (1½" to 10")	80 to 200mm (3" to 8")	150 to 175 mm (6" to 7")
PLAIN CASING PIPES		
Casing Shallow	Casing Medium	Casing Deep
150 to 300mm (6" to 12")	40 to 300mm (1½" to 12")	100 to 300 mm (4" to 12")

Standard

PIPE	TYPE	SIZE (mm)	STANDARD	JOINTS
Ribbed & Slotted Pipes	Ribbed Medium Strainer	40 to 300mm (1½" to 12")	IS 12818:2010	Threaded Joint
	Ribbed Deep Strainer	100 to 250mm (4" to 10")		
Casing Pipes	Casing Medium	40 to 250mm (1½" to 10")		
	Casing Shallow	150 to 250mm (6" to 10")		
	Casing Deep	175 to 250mm (7" to 10")		
Slotted Pipes	Slotted - CM	80 to 200mm (3" to 8")	As per manufacturing standard	
	Slotted - CS	150 to 175mm (6" to 7")		

Note: Boring Pipes are also available as per ASTM D 1785 Standard.

Dimensions

RIBBED SCREEN PIPES									
Nominal Diameter(DN)		Mean Outer Diameter of Pipe (mm)		Medium Well Screen (RMS)			Deep Well Screen (RDS)		
				Mean Outer Diameter over Connection	Wall Thickness (under ribs) (mm)		Mean Outer Diameter over Connection	Wall Thickness (under ribs) (mm)	
Inches	mm	Min	Max	Max	Min	Max	Max	Min	Max
1½	40	52.00	52.20	56.00	3.50	4.00			
2	50	64.00	64.20	69.00	4.00	4.60			
3	80	92.00	92.30	98.00	4.00	4.60			
4	100	117.00	117.30	124.00	5.00	5.70	129.00	7.00	7.90
4½	115	129.00	129.30	136.00	5.00	5.70	141.00	7.50	8.50
5	125	144.00	144.40	154.00	6.50	7.30	156.00	8.00	9.00
6	150	169.00	169.40	182.00	7.50	8.50	184.00	9.50	10.70
7	175	204.00	204.50	219.00	8.80	9.80	221.00	11.80	13.60
8	200	229.00	229.50	247.00	10.00	11.20	251.00	13.00	14.80
10	250	284.00	284.50	302.00	12.50	14.00	309.00	16.00	17.60
12	300	334.00	334.60	356.00	14.50	16.20			

PLAIN CASING PIPES												
Nominal Diameter(DN)		Mean Outer Diameter of Pipe (mm)		Deep Well Casing (CD)			Medium Well Casing (CM)			Shallow Well Casing (CS)		
				Mean Outer Diameter over Connection	Wall Thickness (mm)		Mean Outer Diameter over Connection	Wall Thickness (mm)		Mean Outer Diameter over Connection	Wall Thickness (mm)	
Inches	mm	Min	Max	Max	Min	Max	Max	Min	Max	Max	Min	Max
1½	40	48.00	48.20				52	3.50	4.00			
2	50	60.00	60.20				65	4.00	4.60			
3	80	88.00	88.30				94	4.00	4.60			
4	100	113.00	113.30				120	5.00	5.70			
5	125	140.00	140.40				150	6.50	7.30			
6	150	165.00	165.40				178	7.50	8.50	174	5.70	6.50
7	175	200.00	200.50	217	11.80	13.60	215	8.80	9.80	211	7.00	7.80
8	200	225.00	225.50	247	13.00	14.80	243	10.00	11.20	238	7.60	8.80
10	250	280.00	280.50	304	16.00	17.60	298	12.50	14.00	292	9.60	11.00
12	300	330.00	330.60	359	19.00	21.00	352	14.50	16.20	346	11.20	13.30

Features & Benefits



Easy to Handle



Corrosion Free



Ultimate Tensile Strength and Impact Strength



Maximum Yield of Water



Easy Joining & Installation



Non-Toxic



Non-Conductive



Long Life

Applications

- Borewell & Tybewell application





Complete range of Polymer Piping System & Bath Fittings

CPVC | UPVC | SWR | UGD | HDPE | Borewell
Agriculture | Cistern | Seat Cover | Bath Fittings | Tanks

Toll Free: 1800 889 9779



Marketing Office: Tirumala Building (12th Floor)
22 East Topsia Road, Tiljala, Kolkata 700 046, W.B., India

P: +91 90512 12345

E: enquiry@skipperlimited.com

W: www.skipperpipes.in

Works:

Uluberia (West Bengal) | Guwahati (Assam)

Follow us:

